

# Vortex impeller



# 150UY


3-phase  
50Hz

## Specifications:


Model		Colour code curve	Bore mm	Power output kW	Phases	r.p.m.	Head max. m	Capacity max. l/min	Starting method	Dry weight kg without cable		Impeller passage mm
free standing	with guide rail fitting									free standing	with guide rail fitting	
150UY429.2	TOS150UY429.2	1	150	29,2	3	1450	24,0	5300	star/delta	463,0	463,0	100



Discharge bore mm		150mm		
Pumping Fluid	Temperature	0-35°C		
	Type of Fluid	Municipal sewage		
Pump	Components	Impeller	Vortex impeller	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Grey iron casting EN-GJL-250	
		Casing	Grey iron casting EN-GJL-250	
		Shaft Seal	SiC, upper in oil bath	
Wearing	Bronze			
Motor	Type, Poles		Induction motor, 4 poles, IP68	
	Lubrication		Turbine oil (ISO VG32)	
	Insulation		Insulation class H	
	Motor Protector (built-in)		Miniature protector	
	Phase / Voltage		3-phase / 400V / 50Hz / s.d.	
	Material	Casing	Grey iron casting EN-GJL-250	
		Shaft	Stainless steel EN-X5CrNiMo17-12-2	
Cable		Rubber, 10m H07RN8-F		
Discharge Connection		Flange DIN/ANSI DN150 (PN10)		
Optional Accessories		Guide rail fitting "TOS" (guide support, duck foot bend, lifting chain) / Bend and stand set for free standing types		

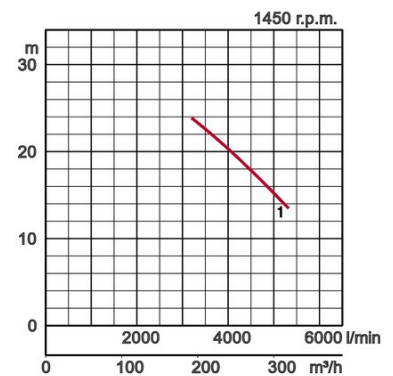

Model	A	B	B1	C	C1	DN1	DN2	DN3	F1	F2	F3	G	H	J1
150UY429.2	1353	620	380	464	232	150	200	6"	250	380	666	600	1037	273

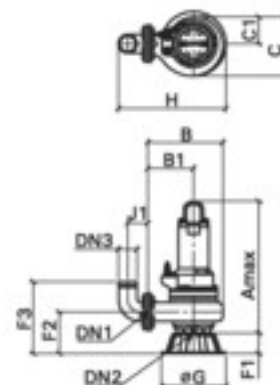

W1: lowest running water level