

# Canal impeller



# 150BY


3-phase  
50Hz

## Specifications:


Model		Colour code curve	Bore mm	Power output kW	Phases	r.p.m.	Head max. m	Capacity max. l/min	Starting method	Dry weight kg without cable		Impeller passage mm
free standing	with guide rail fitting									free standing	with guide rail fitting	
150BY412.2	TOS150BY412.2	1	150	12,2	3	1450	22,2	5833	star/delta	227,0	227,0	100



Discharge bore mm		150mm		
Pumping Fluid	Temperature	0-40°C		
	Type of Fluid	Municipal sewage		
Pump	Components	Impeller	Single channel impeller	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Grey iron casting EN-GJL-250	
		Casing	Grey iron casting EN-GJL-250	
		Shaft Seal	SiC, upper in oil bath	
Wearing	Bronze			
Motor	Type, Poles	Induction motor, 4 poles, IP68		
	Lubrication	Turbine oil (ISO VG32)		
	Insulation	Insulation class H		
	Motor Protector (built-in)	Miniature protector		
	Phase / Voltage	3-phase / 400V / 50Hz / s.d.		
	Material	Casing	Grey iron casting EN-GJL-250	
		Shaft	Stainless steel EN-X14Cr-Mo-S17	
Cable		Rubber, 10m H07RN8-F		
Discharge Connection		Flange DIN/ANSI DN150 (PN10)		
Optional Accessories		Guide rail fitting "TOS" (guide support, duck foot bend, lifting chain) / Bend and stand set for free standing types		

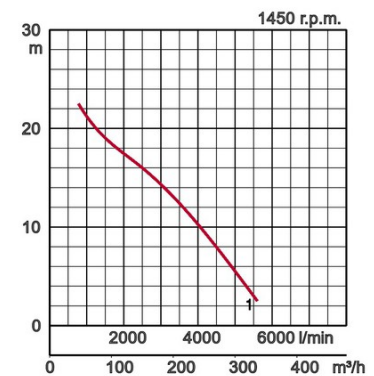

Model	A	B	B1	C	C1	DN1	DN2	DN3	F1	F2	F3	G	H	J1
150BY412.2	895	610	370	467	209	150	150	6"	125	262	548	450	967	273

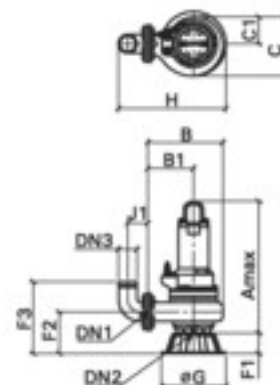

W1: lowest running water level