

Multichannel impeller with cutting mechanism





50GY 3-phase
1-phase
50Hz

Specifications:

Model		Colour code curve	Bore mm	Power output kW	Phases	r.p.m.	Head max. m	Capacity max. l/min	Starting method	Dry weight kg without cable		
free standing	with guide rail fitting									free standing	with guide rail fitting	
50GY21.1S	TOS50GY21.1S	●	1	50	1,1	1	2850	20,4	312	condensor	31,7	31,7



ø Discharge bore mm		50mm	
Pumping Fluid	Temperature	0-35°C	
	Type of Fluid	Municipal sewage	
Pump	Components	Impeller	Multi-vane channel impeller with cutting mechanism
		Shaft Seal	Double mechanical seal
		Bearings	Shielded ball bearings
	Material	Impeller	Grey iron casting EN-GJL-250
		Casing	Grey iron casting EN-GJL-250
		Shaft Seal	SiC and radial ring in oil bath
Cutting device	Stainless steel EN-X39CrMo17-1		
Motor	Type, Poles		Induction motor, 2 poles, IP68
	Lubrication		Turbine oil (ISO VG32)
	Insulation		Insulation class H
	Motor Protector (built-in)		Miniature protector
	Phase / Voltage		Single phase 230V / 50Hz
	Material	Casing	Grey iron casting EN-GJL-250
		Shaft	Stainless steel EN-X5CrNiMo17-12-2
Cable		Rubber, 10m H07RN8-F	
Discharge Connection		Flange DIN/ANSI DN50 (PN10)	
Optional Accessories		Guide rail fitting "TOS" (guide support, duck foot bend, lifting chain) / Bend and stand set for free standing types	

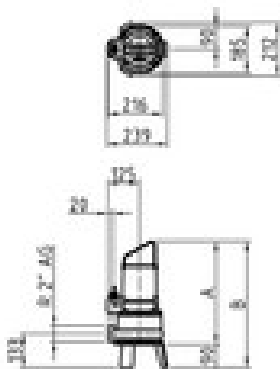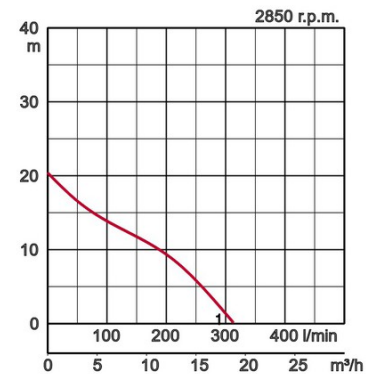

Model	A	B
50GY21.1S	406	496

W1: lowest running water level