

Canal impeller



300BY



3-phase
50Hz

Specifications:

Model		Colour code curve	Bore mm	Power output kW	Phases	r.p.m.	Head max. m	Capacity max. l/min	Starting method	Dry weight kg without cable		Impeller passage mm
free standing	with guide rail fitting									free standing	with guide rail fitting	
300BYM698	TOS300BYM698	1	300	98	3	980	33,0	32460	star/delta	1548,2	1548,2	150



Discharge bore mm		300mm		
Pumping Fluid	Temperature	0-35°C		
	Type of Fluid	Municipal sewage		
Pump	Components	Impeller	Dual channel impeller	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Grey iron casting EN-GJL-250	
		Casing	Grey iron casting EN-GJL-250	
		Shaft Seal	SiC, upper in oil bath	
Wearing	Bronze			
Motor	Type, Poles	Induktionsmotor, 6-polig, trocken, IP68		
	Lubrication	Turbine oil (ISO VG32)		
	Insulation	Insulation class H		
	Motor Protector (built-in)	Miniature protector		
	Phase / Voltage	3-phase / 400V / 50Hz / s.d.		
	Material	Casing	Grey iron casting EN-GJL-250	
		Shaft	Stainless steel EN-X20Cr13	
Cable		Rubber, 10m H07RN8-F		
Discharge Connection	Flange DIN/ANSI DN300 (PN10)			
Optional Accessories	Guide rail fitting "TOS" (guide support, duck foot bend, lifting chain) / Bend and stand set for free standing types			

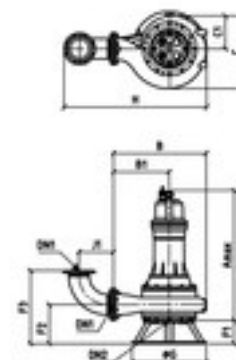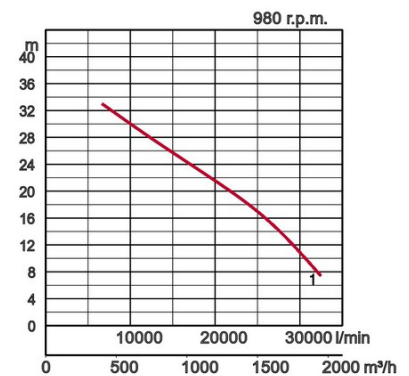

Model	A	B	B1	C	C1	DN1	DN2	DN3	F1	F2	F3	G	H	J1
300BYM698	1773	1100	630	915	386	300	350	300	300	505	1030	1000	1970	527

W1: lowest running water level

Updated 08/2018

Please mind: discharge bend, duck foot bend and stand set are accessories and must be ordered separately