






Specifications:

Diameter air pipe mm	Model		Colour code curve	Power output kW	Phases	r.p.m.	Starting method	tank dimensions			Dry weight kg without cable		
	free standing	with guide rail fitting						length max. m	breadth max. m	depth max. m	free standing	with guide rail fitting	
32	15-BER	TOS-15BER		1	1,5	3	2850	direct	4,0	3,5	4,0	43,0	34,0



ø Air inlet	32mm, 50mm		
Pumping Fluid	Temperature	0-40°C	
	Type of Fluid	Municipal sewage, sewage of food industry	
Pump	Components	Impeller	Non-clog impeller
		Shaft Seal	Double mechanical seal
		Bearings	Shielded ball bearings
	Material	Impeller	Grey iron casting EN-GJL-200
		Casing	Grey iron casting EN-GJL-200
		Suction Plate	Grey iron casting EN-GJL-200
		Diffuser	Construction steel DIN1.0040 nylon coated
		Shaft Seal	Silicon carbide in oil bath
Motor	Type, Poles	Induction motor, 2 poles, IP68	
	Lubrication	Turbine oil (ISO VG32)	
	Insulation	Insulation class F	
	Motor Protector (built-in)	Circle thermal cut-out	
	Phase / Voltage	3-phase / 400V / 50Hz / d.o.l.	
	Material	Casing	Grey iron casting EN-GJL-150
		Shaft	Stainless steel EN-X30Cr13
Cable		Rubber, 10m H07RN-F	
Air pipe connection	Inside thread, flange		

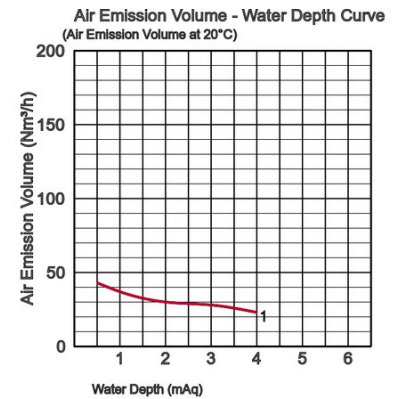

Model	A	A1	A2	D	D1	D2	H	H1	H2
15-BER	895	537	358	222	150	180	562	224	159